FILTERPAK

Perfect for situations with minimal storage space, our FilterPak combines style and convenience in a compact design that allows the operator to carry it just about anywhere.

Standard Features:

Materials:

- Frame: Heavy duty, diamond plated aluminum frame
- Motor: 1/4HP, 1/2HP or 1HP, 115vac, 60Hz
- Filter Heads: Medium pressure, cast aluminum heads
- Pump: Heavy duty, cast steel gear pump. Available in 1, 2, 5 and 10 GPM

Connections: Various quick connect options available

Hoses: 7ft. or 10ft. Clear PVC, steel reinforced hose or hydraulic hose

Power Switch: Sealed On/Off Power Switch

Filter Indicators:

Slide bar indicator triggers at 50psid when elements need to be changed.

Pump Relief:

Opens at 150psi

Weight:

Approx. 50lbs (will vary depending on options)


Dimensions:

8"L x 16"W x 16"H (approx.)

Replacement Elements:

Part Number	BETA Rating	Desired Cleanliness Level (ISO Code)
P1066	B4(c)=2000	14/12/9 - 13/11/8
P1065	B7(c)=2000	18/16/13 - 15/13/10
P1064	ß25(c)=2000	20/18/15 - 19/17/14
P1048WR	Water Removal	

All replacement elements measure 5" x 14".

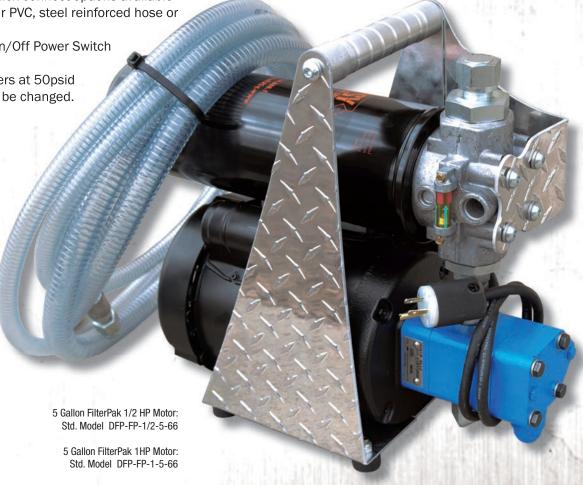



Version 04.01.16