

# SMALL DOUBLER ASSEMBLY

## Heavy Duty Assembly!

Our Small Doubler Assembly provides circuit operation from existing valve.

Part #: ES000266

## Additional Items

- **Field Wirable Electrical Connector:**  
2291-1001
- **Electrical Connector w/ 15' Cordset:**  
VAS22-A653-5M


## Standard Features

- **Flow Rate:** 24 GPM
- **Operating Pressure:** 3,500 PSI
- **Operated:** Electric
- **Manual Override:** Standard
- **Drain:** Internal
- **Circuit:** 01
- **Ports:** #10 Orb Ports
- **Voltage:** 12 DC V
  - Resistance: 3.2
  - Power: 45 W
  - Current: 3.75 A
- **Coil:** DIN 43650 - ISO 4400 Class H; Type M1; IP65
- **Seals:** NBR



# SMALL DOUBLER ASSEMBLY

Don't see the options you need? Contact DFP at [sales@dakotafluidpower.com](mailto:sales@dakotafluidpower.com) or [dakotafluidpower.com](http://dakotafluidpower.com)

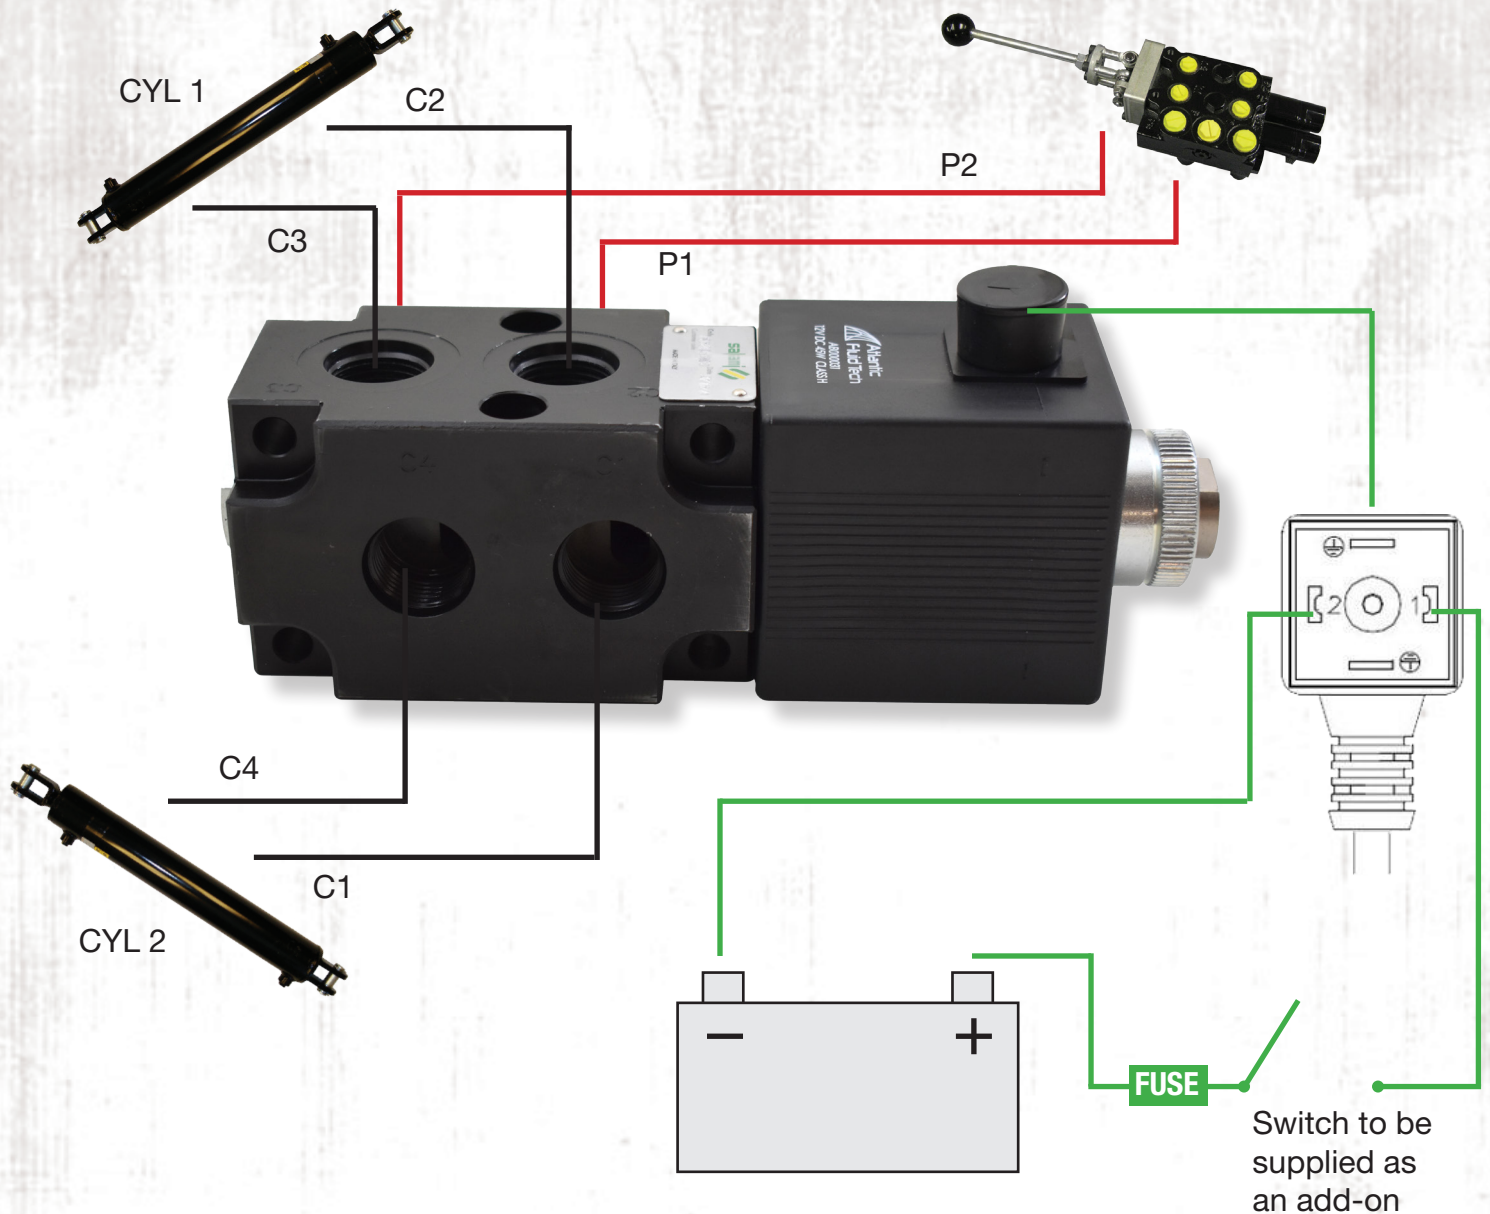

## Assembly Instructions:

- P1 & P2 connect to Valve/Remote Ports for directional flow.
- C1 & C4 Connect to Cyl 1 as these ports are normally open when coil is off. They will close when coil is energized.
- C2 & C3 connect to Cyl 2 as these ports are normally closed when coil is off. They will open when coil is energized.