



SL-30

Slimline Cooler

Great Sidemount Solution!


Our Slimline Cooler Kit is a compact hydraulic reservoir, filter and cooler system. This kit is designed to cool and filter the oil required to operate your hydraulic system. When space is limited behind the cab, our Slimline Cooler is a great solution with it's sidemount off the frame design. All our truck product kits are pre-engineered and are made ready to install on your hydraulic system.

Typical Applications

- Fertilizer Tenders
- Conveyors (Seed & Fertilizer)
- Auger Trailers
- Propane Trailers
- Water Tankers
- Bulk Fuel Trailer
- Winch Trucks



Shown with Optional No Drill Quick Mount

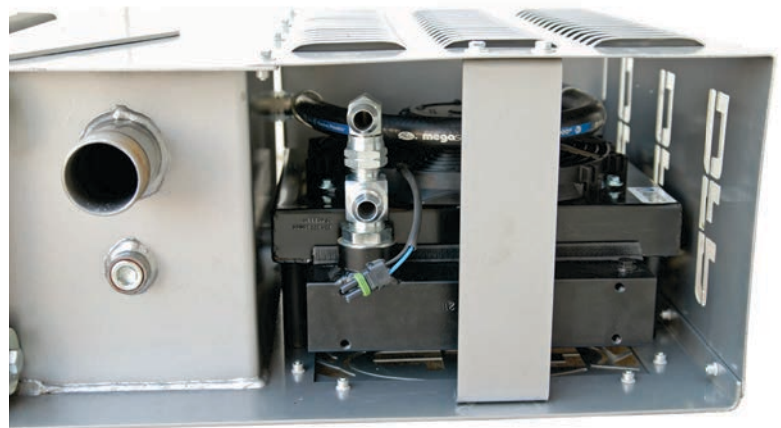

EPG-SLIMLINE-01.01.17



EPG
ENGINEERED PRODUCTS GROUP

2210 W. Main Ave. W Fargo, ND 58078 | 877.410.7072 | www.epgdivision.com

A DIVISION OF DAKOTA FLUID POWER, INC.



SL-30

Slimline Cooler

Don't see the options you need? Contact EPG at 1(877) 410-7072

Models Available:

- EPG00063 - Electric Fan w/ Carbon Steel Chassis
- EPG00064 - Hydraulic Fan w/ Carbon Steel Chassis
- EPG00067 - Electric Fan w/ Stainless Steel Chassis (304 material)
- EPG00068 - Hydraulic Fan w/ Stainless Steel Chassis (304 material)
- EPG00069 - No Drill Quick Mount Kit
- EPG00103 - Bolt On Cover w/ EPG Logo, Carbon Steel
- EPG00105 - Bolt On Cover w/ EPG Logo, Stainless Steel
- **Private label available, please inquire.**

Standard Features:

Materials:

- Frame: #4 Finish Stainless Steel (304 material) or Carbon Steel
- Reservoir: 5 gallon capacity
- Cooler: High efficiency AKG Global Line Cooler w/ Hydraulic or Electric Fan - 25 PSI Bypass
- Filter: 10 Micron Cartridge Filter
- Filler Breather: 10 Micron Filler Breather w/ 4.5 PSI VAC/pressure relief and fill screen
- Porting: SAE O-Ring w/ NPT Suction Port
 - 1-1/4" O-Ring Boss Return
 - 1-1/4" O-Ring Auxiliary Boss Suction
 - 2" NPT Female Suction
 - Port for optional fan control module
- Gauge: Sight Level/Temp. Gauge
- Flow Rate: 30 GPM (Maximum flow rate is variable based on application. Contact Customer Service for details.)
- PSI: 3,000 PSI

Optional No Drill Quick Mount:

- Powder Coated Steel w/ vibration isolation mounts and adjustable for 33.5" to 34.5" frames

Weight: Approx. 115 lbs (will vary depending on options)

Dimensions: Approx. 12"W x 20"H x 22"L

Performance:

